



Indoor + Outdoor Rated IP66 Waterproof Zinc Alloy  
Housing No Touch Request To Exit Button Medium Size



User Manual VIS-7042

www.visionistech.com

#### Main Features

- IP66 waterproof
- Zinc-alloy housing
- Output contact: NO/NC/COM
- Sensor distance: 3~10cm (1.18 ~ 3.94in.) - Adjustable
- LED indicators: Red for standby - Green for active

#### Specifications


|                          |  |
|--------------------------|--|
| <b>Operating Voltage</b> | <b>10~24V DC</b>                                 |
| Idle Current             | ≤15mA  |
| Working Current          | ≤25mA  |
| Current Rating           | 2A   |
| Sensor Distance          | 3~10cm (1.18 ~ 3.94in.) - Adjustable             |
| Output                   | NC, NO, COM                                      |
| Infrared Wavelength      | 940 nm   |
| <b>Environment</b>       | <b>IP66 Waterproof</b>                           |
| Operating Temperature    | -20°C ~ +60°C (-4°F ~ 140°F)                     |
| Operating Humidity       | 0% ~ 95%   |
| <b>Physical</b>          | <b>Zinc-alloy</b>                                |
| Dimension                | L105 x W69 x H20mm<br>(L4.14 x W2.72 x H0.79in.) |
| Unit Weight              | 215g   |

- 01 -

#### Wiring

| Wire Color | Function | Notes           |
|------------|----------|-----------------|
| Red        | Power +  | 10~ 24 Volts DC |
| Black      | GND      | Ground          |
| Green      | NC       | Normally Closed |
| Brown      | COM      | Common          |
| White      | NO       | Normally Open   |

#### Sensor Distance Adjustment

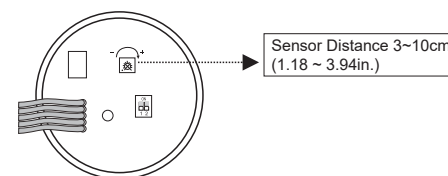

- 02 -

#### Packing List

| Item              | Quantity |
|-------------------|----------|
| Gif Box           | 1        |
| No Touch Button   | 1        |
| Manual            | 1        |
| Sel Tapping Screw | 2        |
| Wall Fixing Plug  | 2        |