


TANE ALARM PRODUCTS



"We Contact The World"®

Installation instructions for SM-35 family of Surface Mount - Door and Window Contacts with Quick Connect Terminals

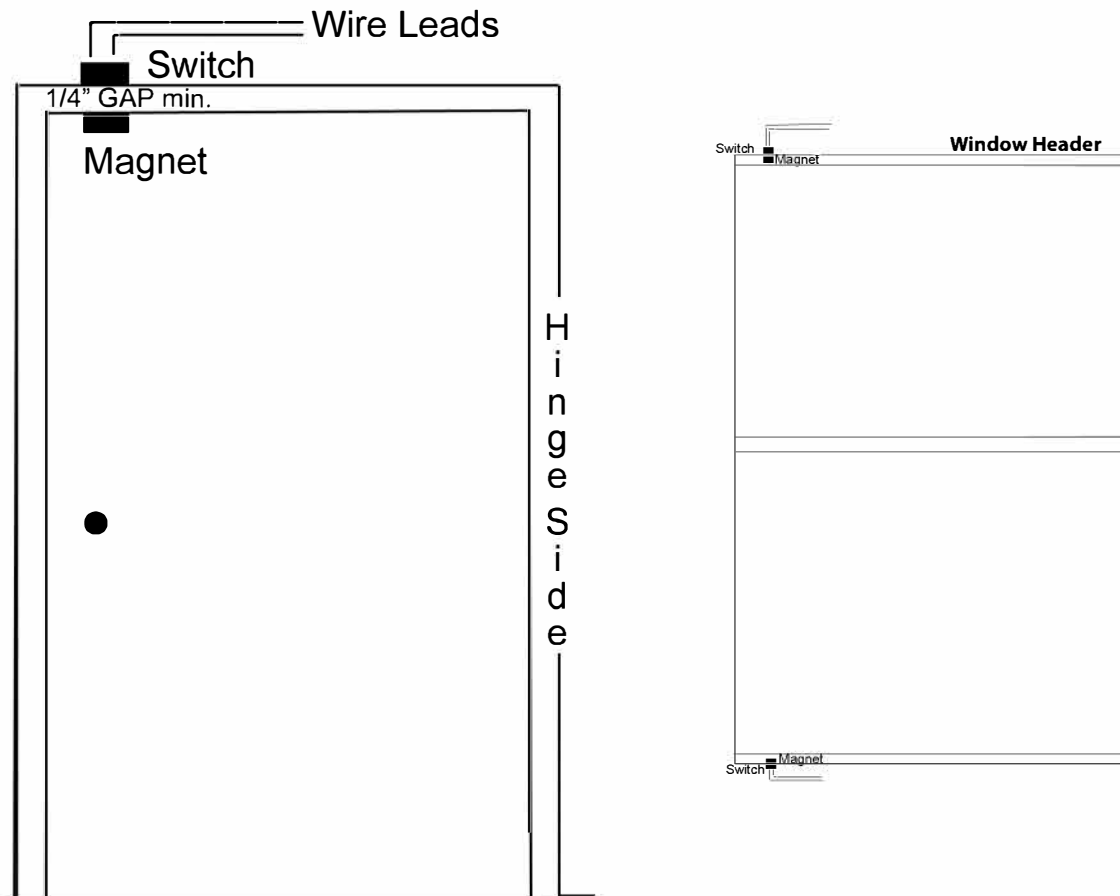

- Surface mount switch at top or side (NOT on hinge side) of door or hinged window frame
- On double hung window, surface mount the switch at top, side or bottom of window frame
- Surface mount the magnet parallel to the switch
- Make sure Gap is not less than 1/4" between switch and magnet
- Insert leads from alarm circuit under terminals
- Designed for use with Steel (use spacers), Wood and other door and window surfaces